

T: 905.563.4I33

Toll Free: 1.800.263.0213


F: 905.563.0445 www.pllight.com




FIXTURE	HSE NXT II
Project	
Notes	

NXT2 - Beta Reflector







Wire Bracket – Side View

Wire Bracket – End View






TECHNICAL SPECIFICATIONS†					
	600)W	1000₩		
RATED MAIN VOLTAGE	277V	347V	277V	347V	400V
Input Current	2.29A	1.86A	3.77A	3.01A	2.58A
Power Factor	>0.98		>0.98		
Input Frequency	50/60Hz		50/60Hz		
Actual Input Power	630W	630W	1,045VV	1,045VV	1,032W
Lamp Type	HPS 600W	400V Electronic	HPS / MH	I,000VV 400	V Electronic


 $^{^{\}dagger}$ Accurate to \pm 10%

SPECIFICATION						
I. FIXTURE	2. FIXTURE WATTAGE	3. VOLTAGE	4. LIGHT SOURCE	5. REFLECTOR	6. CORD / PLUG	7. MOUNTING
NXT2 NXT2 RST	600W I,000 Watts	277V 347V 400V*	600W USHIO HPS DBL I,000W Philips HPS DBL I,000W USHIO HPS DBL I,000W USHIO MH DBL	Alpha Beta Asymmetric	Consult Factory	Std Truss Hanging Bracket Std Track Hanging Bracket Custom Hanging Bracket


Warranty Terms: Fixtures warrantied for three (3) years; electronic drivers three (3) years; HPS Lamps: four (4) years or 10,000 burning hours / MH Lamps: one (1) year or 6,000 burning hours, whichever comes first.


DIMENSIONS

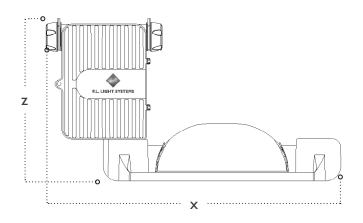

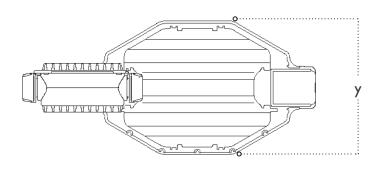

with Alpha / Beta Reflector				
x = length	23.375 in. (59.4cm)			
y = width	10.25 in. (26cm)			
z = height	12.0 in. (32.6cm)			
weight	8.82 lbs (4.0kg)			

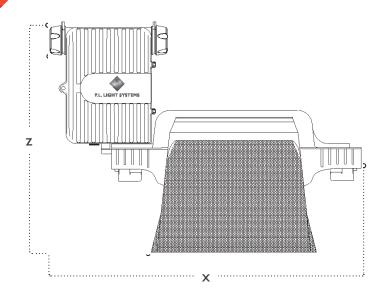

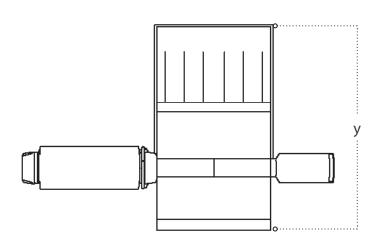

with Asymmetric Reflector			
x = length	22.75 in. (57.79 cm)		
y = width	14.00 in. (35.56 cm)		
z = height	15.50 in. (34.29 cm)		
weight	9.48 lbs (4.3 kg)		